Installation for dart board
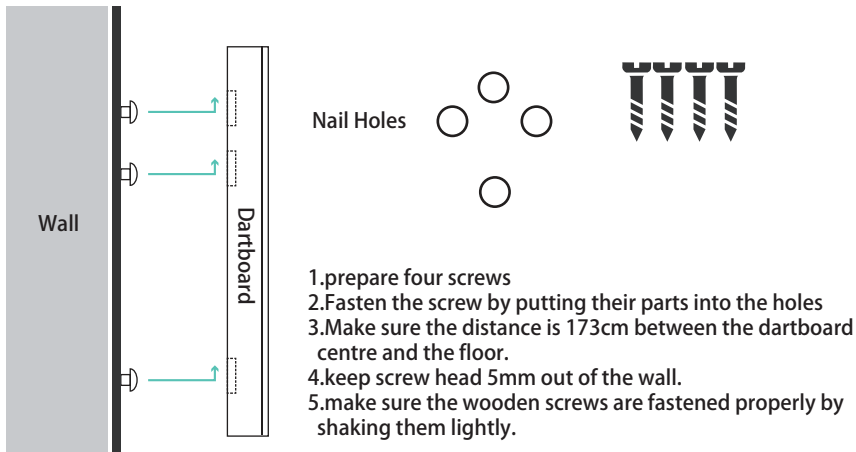## VDarts H2&H2L Global Online Dartboard

Installation Place Of Dartboard

Dartboard

Height
keep the center of the dartboard (bull)173cm away from floor

Distance
Set the throw line (point where darts are thrown) 244cm from the surface of the dartboard.

173cm

Throw Line

244cm

Dartboard Installation

Wall

Dartboard

Nail Holes

1.prepare four screws
2.Fasten the screw by putting their parts into the holes
3.Make sure the distance is 173cm between the dartboard centre and the floor.
4.keep screw head 5mm out of the wall.
5.make sure the wooden screws are fastened properly by shaking them lightly.

⚠ 1. Only use screws for installation on wood surfaces.
2. Use bolts or studs if dartboard is to be installed on a concrete wall.
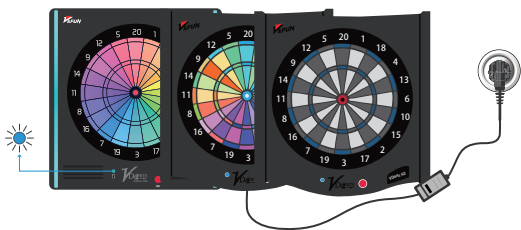
User Manual

VDarts H2&H2L Global Online Dartboard

Bluetooth pairing and connection

01

Turn on the dartboard. The Bluetooth indicator light will flash which means the dartboard is in search mode.

02

Turn on Bluetooth on your phone/tablet (Settings – Bluetooth)

03

Open APP,wait 5-10 seconds, APP will automatically link with dartboard.

VDartsGame

VDartsGame

04

When connected successfully, the Bluetooth indicator light will stop blinking and remain solid blue.

05

After that you can login, choose and start the game.

Notice: You do not need to link the device manually. Wait for the device to connect automatically.
If asked for the PIN code, enter 1608.
If connection fails, reboot your dartboard or device, and try again.
For more information, visit http://help.vdarts.net/en/